

TIBUS

OFFROAD ENGINEERING

High Performance Winch TW 15000


Technical Data

Motor:	2 x 6,8 HP / 12 VDC optional 2 x 8 HP and 24 VDC at extra charge
Relay:	waterproof IP 68
Drum bearing:	extra strong, sealed ball bearings
Free spool:	works pneumatically
Rope:	up to 100 m depending on strength, rope not included, delivery at extra charge
Versions:	drum width 0,22 m or 0,31 m optional

Different ratios available for more pulling power or higher line speed.
We offer the following ratios: 0 %, 45 %, 70 % and 100 % faster then standard, which corresponds to a line speed of about 25 m to 50 m per minute (without load).
Please note that as the speed increases the traction decreases at the same degree.

Special features:

Motors and drums additionally sealed.
Reinforced brake shaft ISI 4340 steel, hardened and polished; HD gear set, gear set forged, hardened and polished for maximum precision and strenght.
The motors are additionally supported, frame with additional reinforcement made of stainless steel. Housing made of high performance 7075T6-alloy for unrivaled stability, anodised for additional corrosion protection.

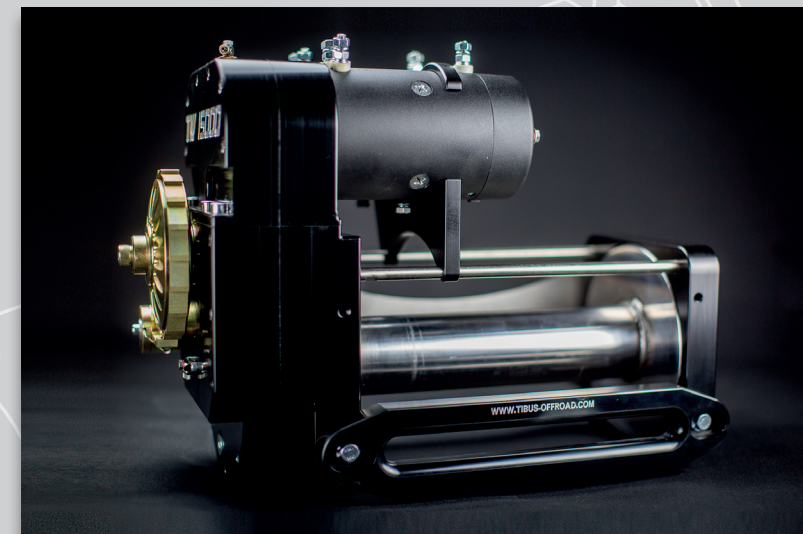

Whatever you want, wherever you go...

TIBUS Offroad Ltd. & Co. KG
Roffhausener Landstrasse 25
26419 Schortens / Germany
Tel.: +49 (0) 4421 70 69 1
Fax: +49 (0) 4421 70 19 10
info@tibus-offroad.com
www.tibus-offroad.com

